




CHASSIS MOUNT CQB150W-110S SERIES 150 WATT 4:1 INPUT DC-DC CONVERTERS



FEATURES

- * 150W Isolated Output
- * Efficiency to 91%
- * Fixed Switching Frequency
- * 4:1 Input Range
- * Regulated Outputs
- * Remote On/Off
- * Low No Load Power Consumption
- * Over Temperature Protection
- * Over Voltage/Current Protection
- * Continuous Short Circuit Protection
- * Shock & Vibration Meets EN50155 (EN61373)
- * Safety Meets UL60950-1, EN60950-1 and IEC60950-1
- * UL60950-1 2nd (Basic Insulation) Approval for DC Modules
- * EN50155:2007 for EMC, Environmental and Characteristic
- * Build-In EMI Filter
- * Fire & Smoke Meets EN45545-2

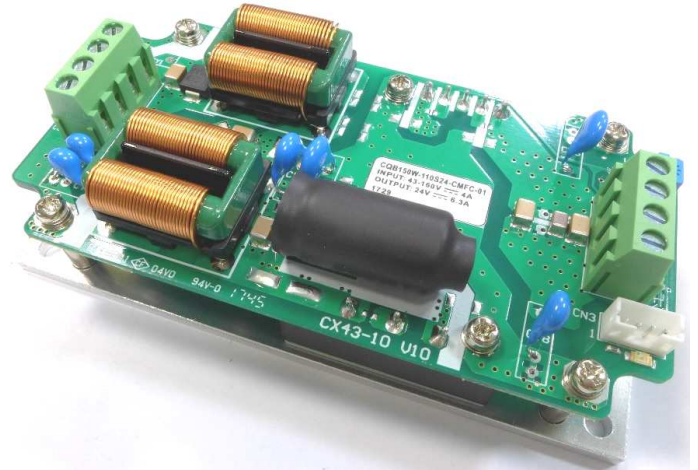

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CQB150W-110S05□-CMFC CQB150W-110S05□-CMFD	43-160 VDC	5 VDC	0 mA	30.0 A	15 mA	1.53 A	89	30000µF
CQB150W-110S12□-CMFC CQB150W-110S12□-CMFD	43-160 VDC	12 VDC	0 mA	12.5 A	15 mA	1.50 A	91	12500µF
CQB150W-110S24□-CMFC CQB150W-110S24□-CMFD	43-160 VDC	24 VDC	0 mA	6.3 A	15 mA	1.56 A	88	6300µF
CQB150W-110S28□-CMFC CQB150W-110S28□-CMFD	43-160 VDC	28 VDC	0 mA	5.4 A	15 mA	1.56 A	88	5400µF
CQB150W-110S48□-CMFC CQB150W-110S48□-CMFD	43-160 VDC	48 VDC	0 mA	3.2 A	15 mA	1.56 A	89.5	1000µF

NOTE:

1. Nominal Input Voltage 110VDC
2. □ = N or None.
3. VR1 is used for Output Voltage Adjustment.
4. Refer to application note for thermal resistance and derating informations.
5. TVS is included for input surge voltage protection.
6. Recommend an external fuse for input reverse polarity protection (shunt diode is included inside).

SPECIFICATIONS

All Specifications Typical at Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	110V	43-160V
Input Surge Voltage (100ms max.)	110V	200Vdc max.
Under voltage lockout	110Vin power up	41.5V
	110Vin power down	38.5V

Positive Logic Remote On/Off (see note 4&5)

OUTPUT SPECIFICATIONS:

Voltage Accuracy	±1.0% max.
Transient Response: 25% Step Load Change	<250usec
Trim Adj. Range (By VR1)	±10%
Ripple & Noise, 20MHz BW	
5V&12V	40mV RMS, 100mV pk-pk max.
24V&28V	100mV RMS, 200mV pk-pk max.
48V	150mV RMS, 300mV pk-pk max.
Temperature Coefficient	±0.02%/°C max.
Short Circuit Protection	Continuous
Line Regulation (note1)	±0.2% max.
Load Regulation (note2)	5V
	±0.5% max.
	Others
	±0.2% max.
Over Voltage Protection Trip Range, % Vo nom.	115-140%
Current Limit	110% ~160% Nominal Output
Start up Time	100ms typ.
Hold up Time	See Application Note


NOTE:

1. Measured from high line to low line.
2. Measured from full load to zero load.
3. Output ripple and noise measured with 1uF ceramic capacitor across output.
4. Logic Compatibility open collector ref to -input
 - Module on >3.5Vdc to 160Vdc or open circuit
 - Module off 0 to< 1.2Vdc
5. Suffix "N" to the model number with negative logic remote on/off
 - Module on 0 to< 1.2Vdc
 - Module off >3.5Vdc to 160Vdc or open circuit
6. Output connector CN3 wafer with TAIWAN KING PIN TERMINAL P110I series and mate with JST housing PH series or equivalent.
7. CN1 & CN2 connection: DINKLE EK500V-04P series or equivalent, suitable electric wire: 24~12AWG(IEC 0.5~2.5mm²).


Case Dimensions:

All Dimensions In Inches (mm)
 Tolerance Inches: X.XX=±0.02, X.XXX=±0.010
 Millimeters: X.X=±0.5, X.XX=±0.25

CMFC

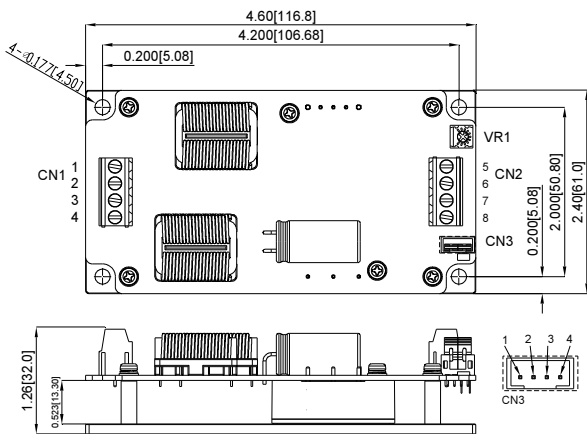

CMFD with Cover

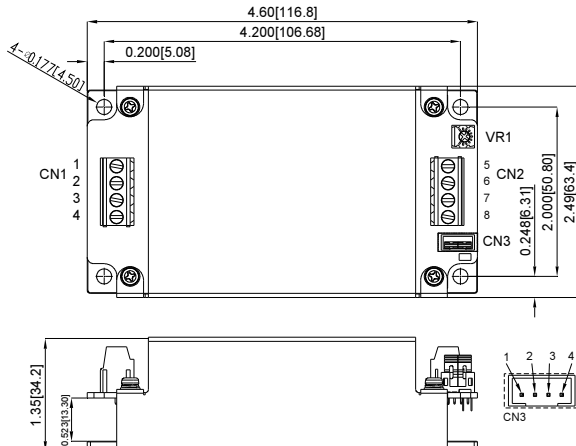

CN1&CN2 PIN CONNECTION

Pin	Function
1	+V Input
2	-V Input
3	Remote
4	Case
5	+V Output
6	+V Output
7	-V Output
8	-V Output

CN3 PIN CONNECTION

Pin	Function
1	-V Output
2	-Sense
3	+Sense
4	+V Output