



CFM351M SERIES

350 WATT MEDICAL AC-DC POWER SUPPLY WITH PFC



Features

- * Universal Input Range 90~264Vac
- * Meets EN60601-1 and EN55011 Class B
- * 350W with free air convection @ 220Vac
- * Active PFC Meets EN61000-3-2 Class D
- * High Efficiency Up to 93% Typical
- * Remote Voltage Sense
- * PS ON/OFF Remote Control
- * +5V Stand-by Output Power
- * 12V fan output
- * Meets 2MOPP



MODEL	VOLTAGE OUTPUT	OUTPUT CURRENT(A)		RIPPLE & NOISE	VOLTAGE ADJ.RANGE	VOLTAGE ACCURACY	LINE REG.	LOAD REG.	%EFF. (Typ)
		RATED1	RATED2						
Main Output Voltage									
CFM351M050	+5 V	60	40	100 mVp-p	4.75~5.25	±1.0%	±0.5%	±1%	88%
CFM351M120	+12 V	29.2	25	120 mVp-p	11.4~12.6	±1.0%	±0.5%	±1%	92%
CFM351M240	+24 V	14.6	12.5	150 mVp-p	22.8~25.2	±1.0%	±0.5%	±1%	93%
CFM351M480	+48 V	7.3	6.25	150 mVp-p	45.6~50.4	±1.0%	±0.5%	±1%	93%
Stand-by Output Voltage									
All	+5.0 V	0.3	0.3	---		---	---	---	
Fan Output Voltage									
All	+12.0 V	0.3	0.3	---		---	---	---	

Note: 1. RATED1: 10CFM Air Flow

2. RATED2: Natural Convection (at 110 ~ 200 Vac, refer to derating curve)

Specifications

INPUT SPECIFICATIONS:

AC Input Voltage 90~264Vac
 Frequency 47 to 63Hz
 Inrush Current 50A max. @240Vac
 Leakage Current @ 264Vac 300uA max.

OUTPUT SPECIFICATIONS:

Total Rated Output Power 350W
 Remote Voltage Sense Compensates for Wire Voltage Drop
 Adjustment Range on Vout ±5%
 Hold-up Time 16ms typ.
 Over Voltage Protection Recycle AC Input to restart
 Short Circuit Protection Hiccup mode(Auto Recovery)
 Temperature Coefficient ±0.05%/°C

GENERAL SPECIFICATIONS:

Isolation Input to output = 5656VDC
 Operating Temperature -20 ~ 70°C (see Derating Curve)
 Storage Temperature -40~85°C
 Humidity 93% RH max. Non condensing
 Switching Frequency 55KHz Typical
 MTBF MIL-HDBK-217F, GB, 25°C/115VAC 100Khrs min.
 Altitude 3000m
 Dimensions 6.500x4.000x1.516 Inches (165.00x101.60x38.60mm)
 Weight 640g(1.42Pounds)

SAFETY AND EMC:



Emission and Immunity (Ed. 4.0) EN55011 Class B, FCC CFR 47 Part 15
 EN60601-1-2, IEC61000-3-2, 3, IEC61000-4-2, 3, 4, 5, 6, 8, 11
 Safety (Ed. 3.1) IEC60601-1:2005+A1:2012
 EN60601-1:2006+A11:2011+A1+A12, UL ANSI/AAMI ES60601-1:2005

NOTE:

1. Add a 0.1uF ceramic capacitor and a 47uF E.L. capacitor to output for Ripple & Noise measuring @20MHz BW.
2. Voltage accuracy is set at 60% rated load and 25°C.Ta.
3. Line regulation is measured from high line to low line with rated load.
4. Load regulation is measured at 60%±40% rated.
5. CN1: LONG CHU P3060 Series or Equivalent
 CN2: JST B2B-PH-K-S or Equivalent
 CN5: LONG CHU P220V Series or Equivalent

Mechanical Specification

Tolerances Inches: X.XX= ±0.04 , X.XXX= ±0.010
 Millimeters: X.X= ±1.0 , X.XX=±0.25

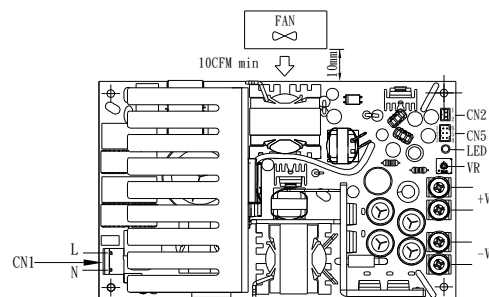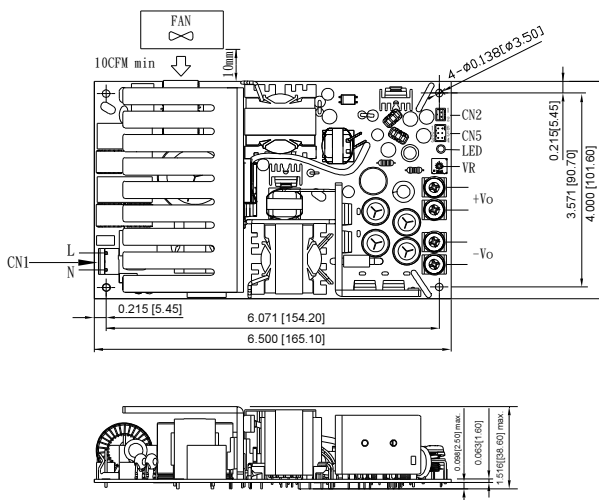


FAN location for CFM351M050 only

CN5: PIN CONNECTION		CN2: PIN CONNECTION	
Pin	Function	Pin	Function
1	GND	4	-SENSE
2	+5VSB	5	ENABLE
3	+SENSE	6	GND
		1	FAN output+
		2	FAN output-

NOTE: Pull down Enable to activate the PSU

CFM351M Series Derating Curve

350W With 10CFM Air Flow

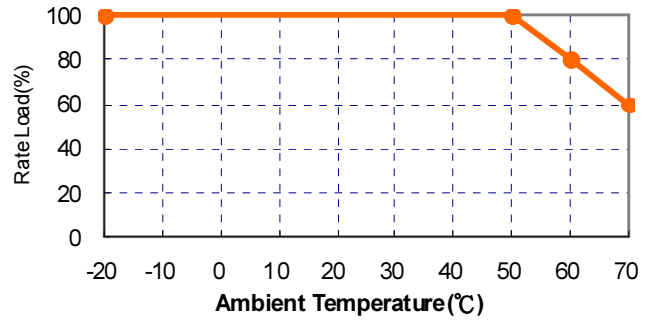

350W With Natural Convection

